


Anti-Cavitation Valve for Bent Axis Motors



Anti-Cavitation Valve for Hydraulic Bent Axis Piston Motors

Designation;
Anti-Cavitation

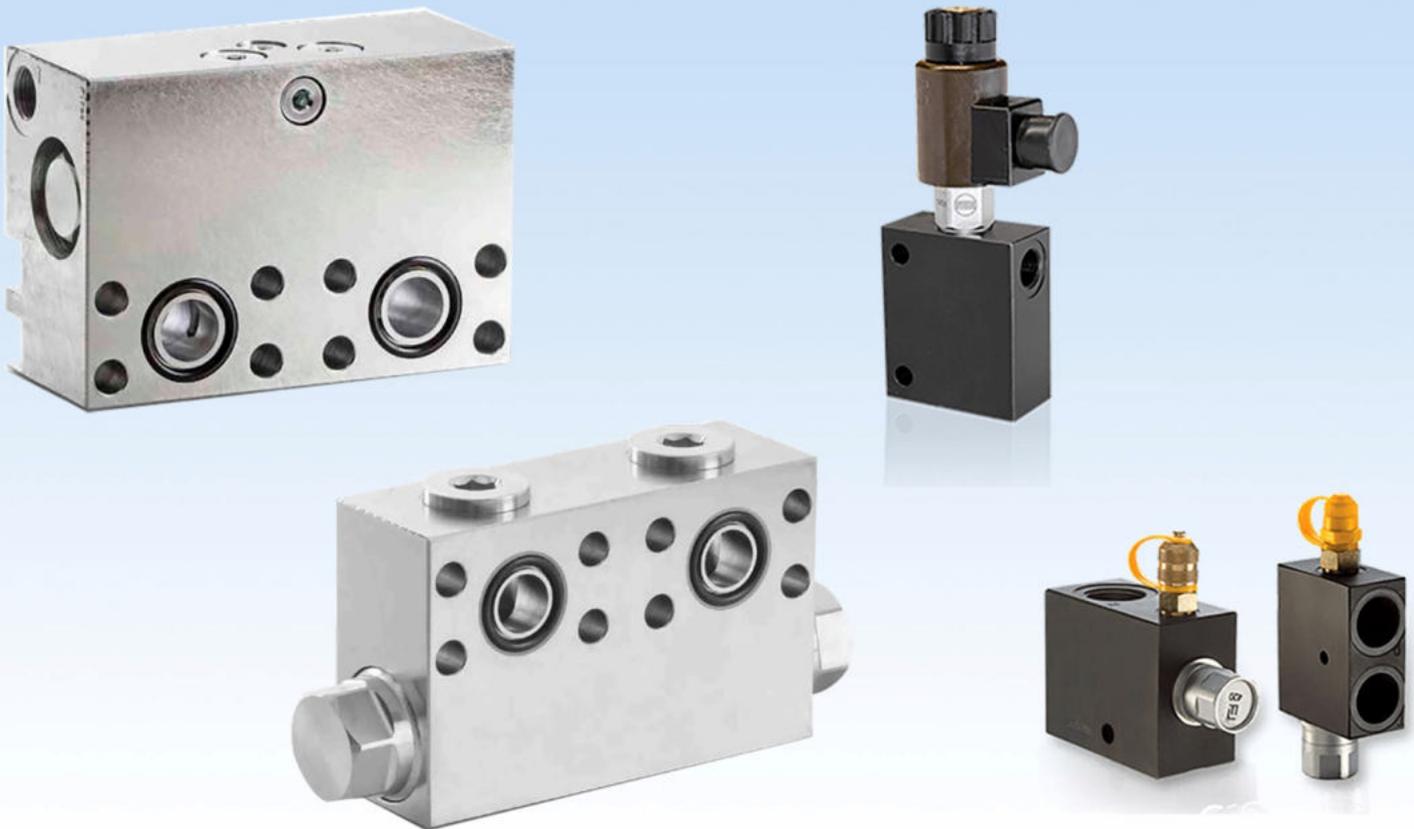


Hidrapac **Store**
www.HIDRAPAC.com.tr


Anti-Cavitation Valve for Bent Axis Motors

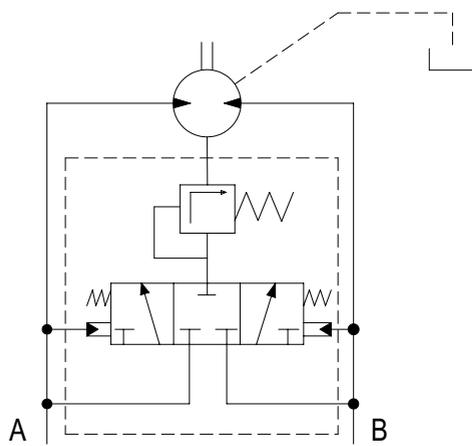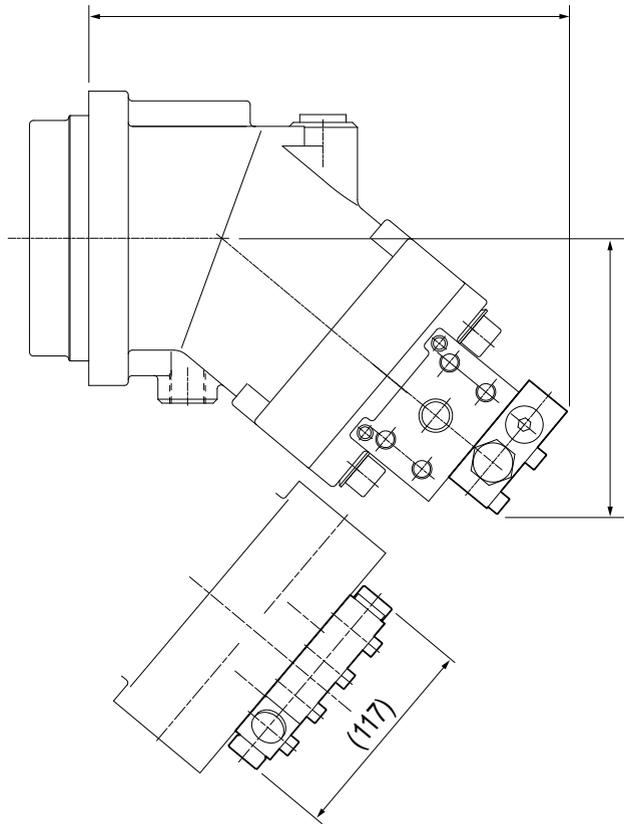


Anti-cavitation valve

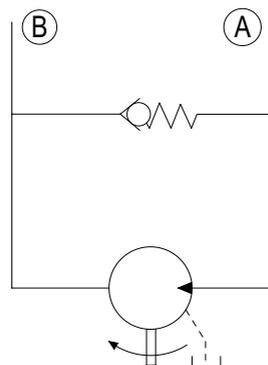

Double pressure relief valve

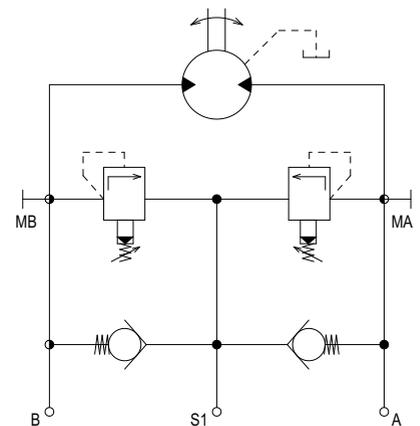





Anti-Cavitation Valve for Bent Axis Motors

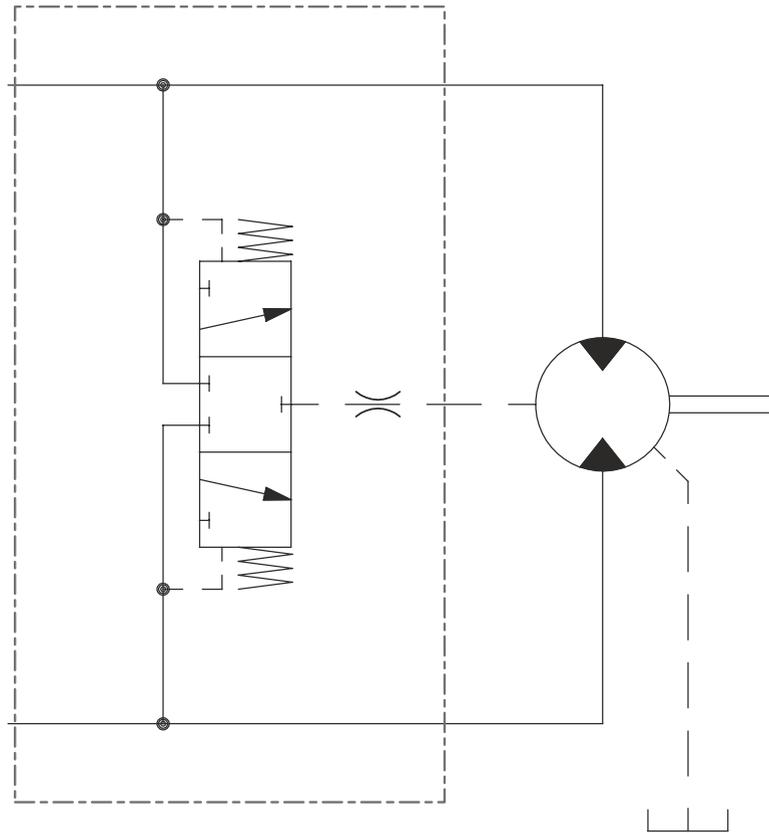



Dimension

| Type | A | B | C | D | E | F | G | T | V |
|---------|-----|----|-------|----|------|------|-------|--------|--------|
| 012-032 | 90 | 49 | 113.5 | 59 | 40.5 | 18.2 | 138.4 | | G 1/2" |
| 040-063 | 100 | 59 | 142 | 75 | 50.8 | 23.8 | – | G 3/8" | G 3/4" |
| 080-130 | 108 | 59 | 160 | 84 | 57.2 | 27.8 | – | | G 1" |



Anti-Cavitation Valve for Bent Axis Motors

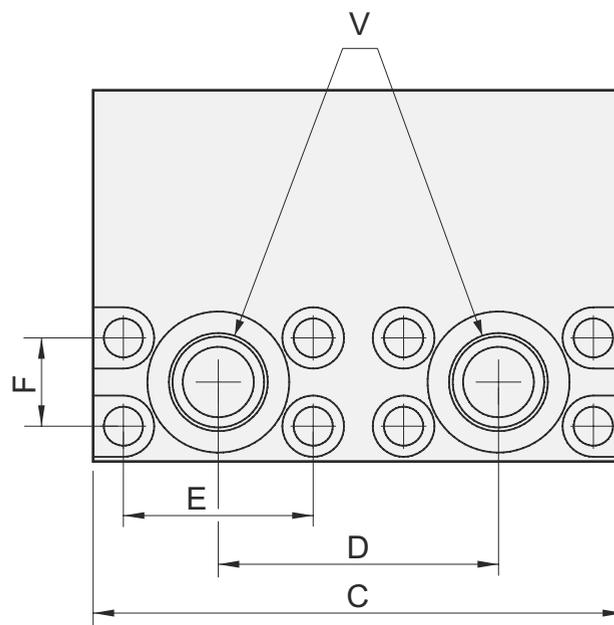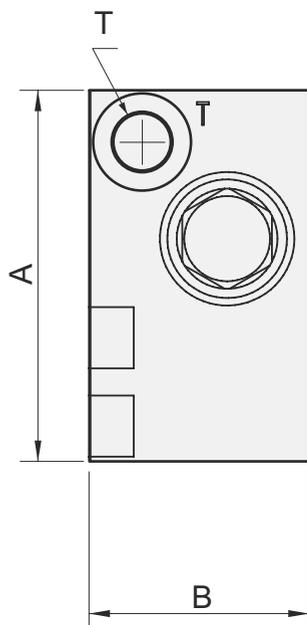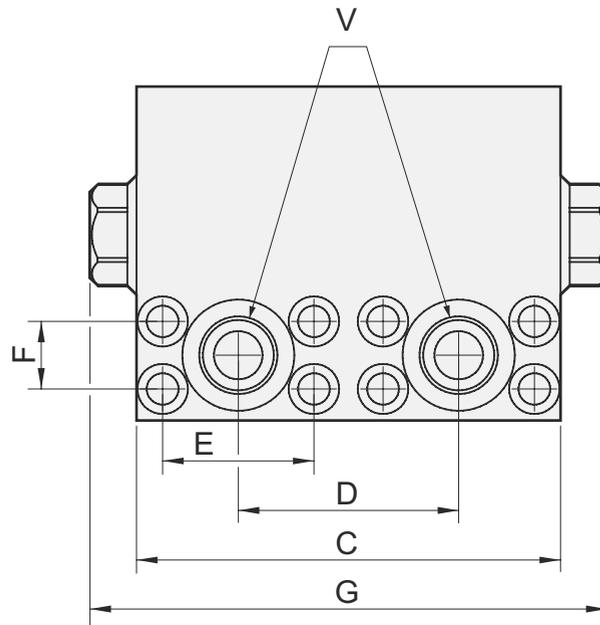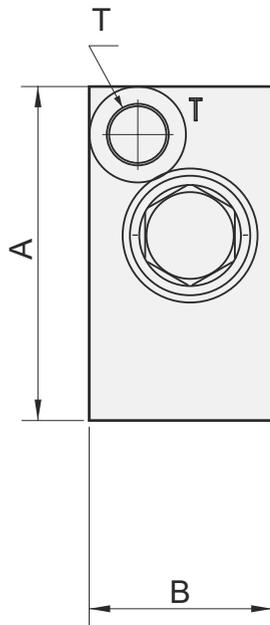



Anti-Cavitation Valve for Bent Axis Motors

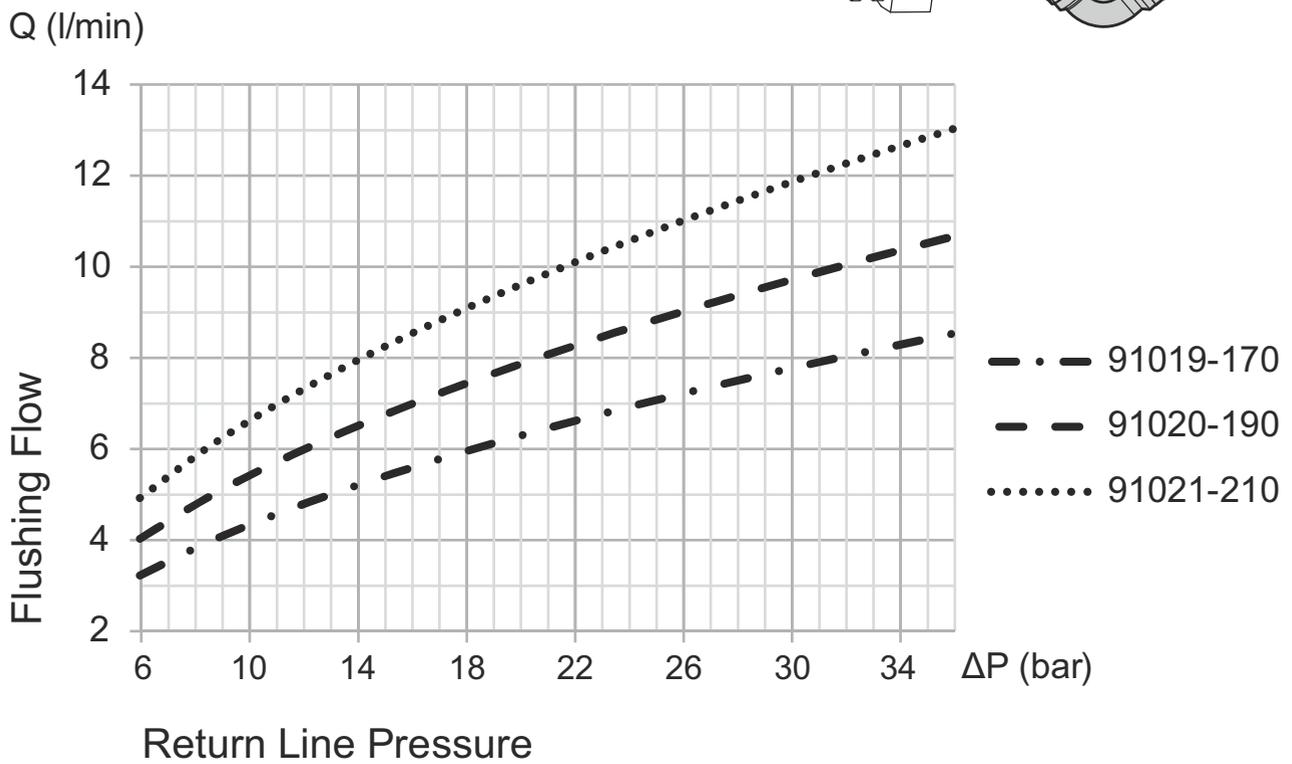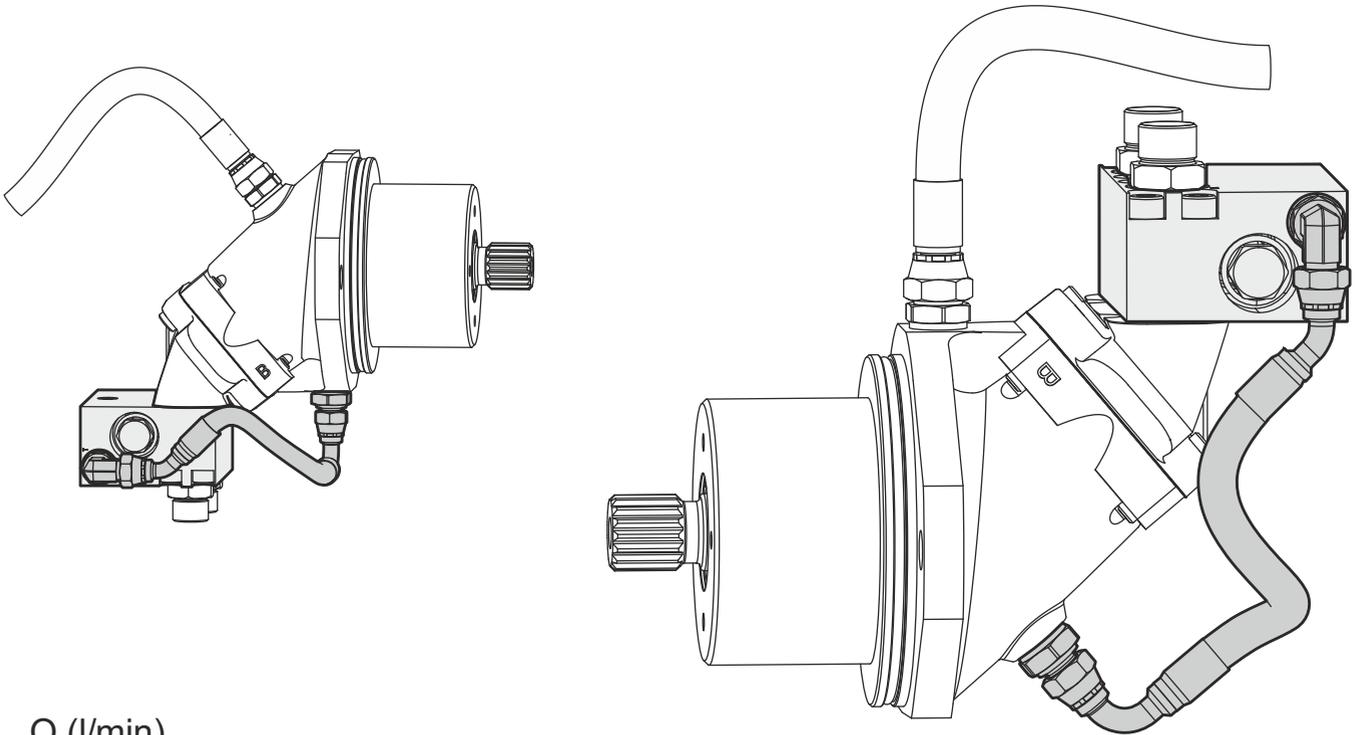

Circulation Valve for Bent Axis Motors

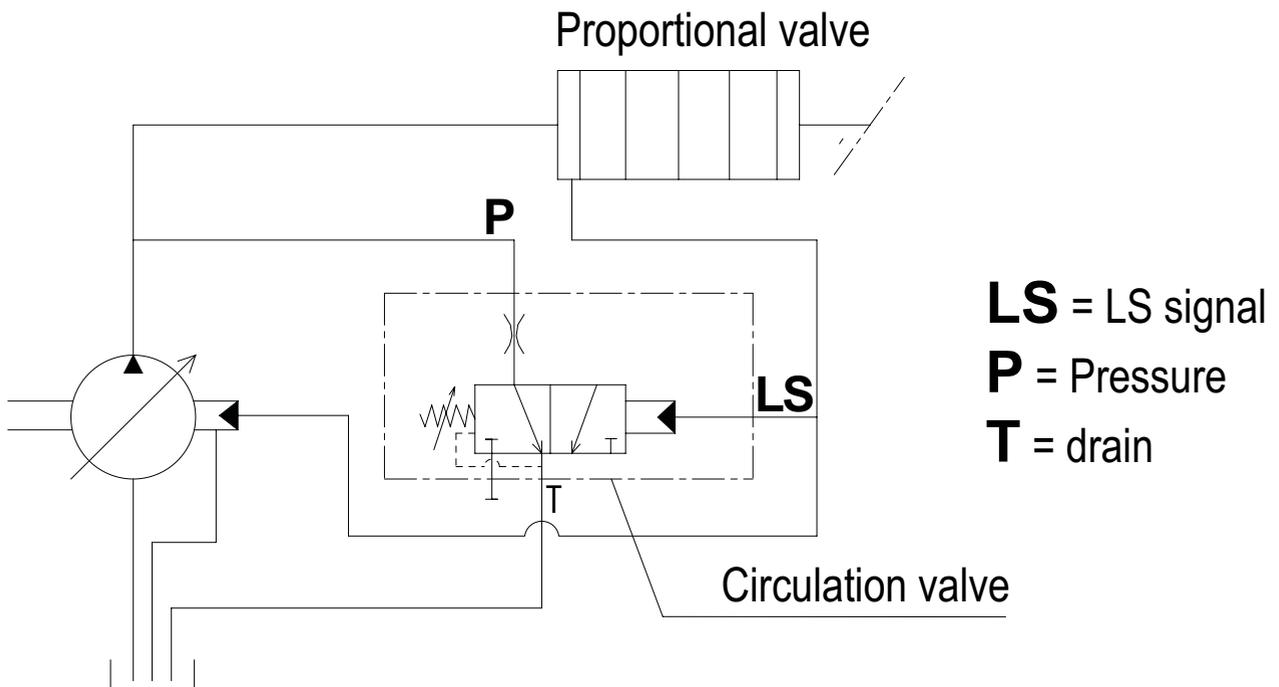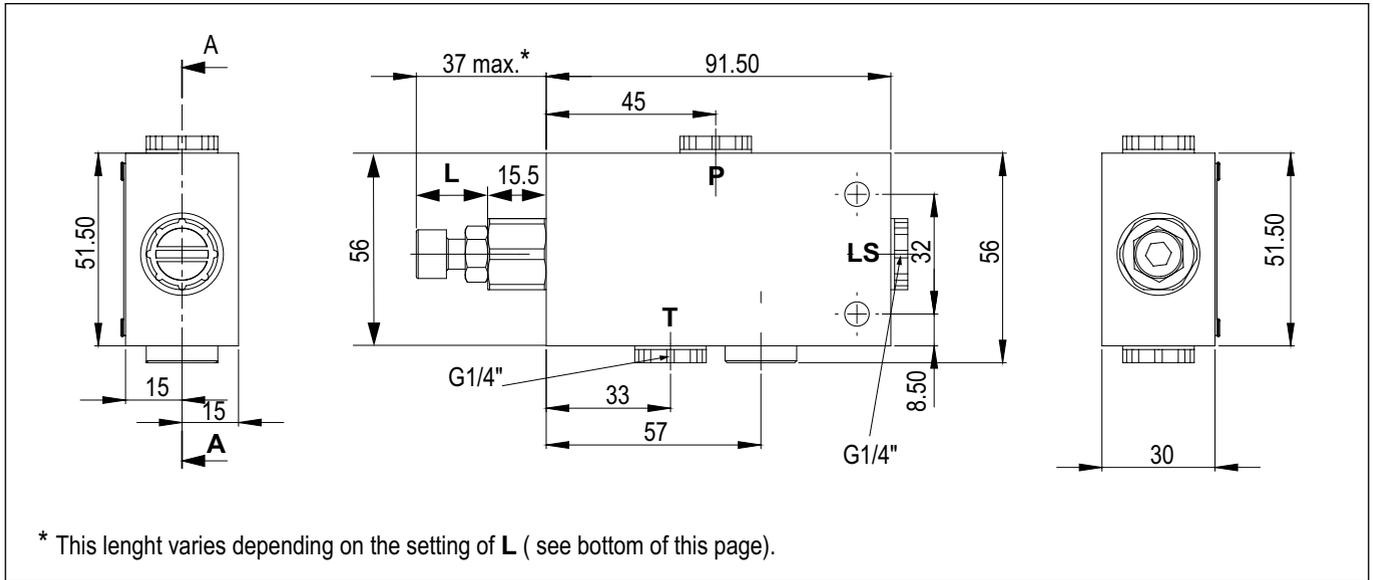

Circulation Valve for Bent Axis Motors

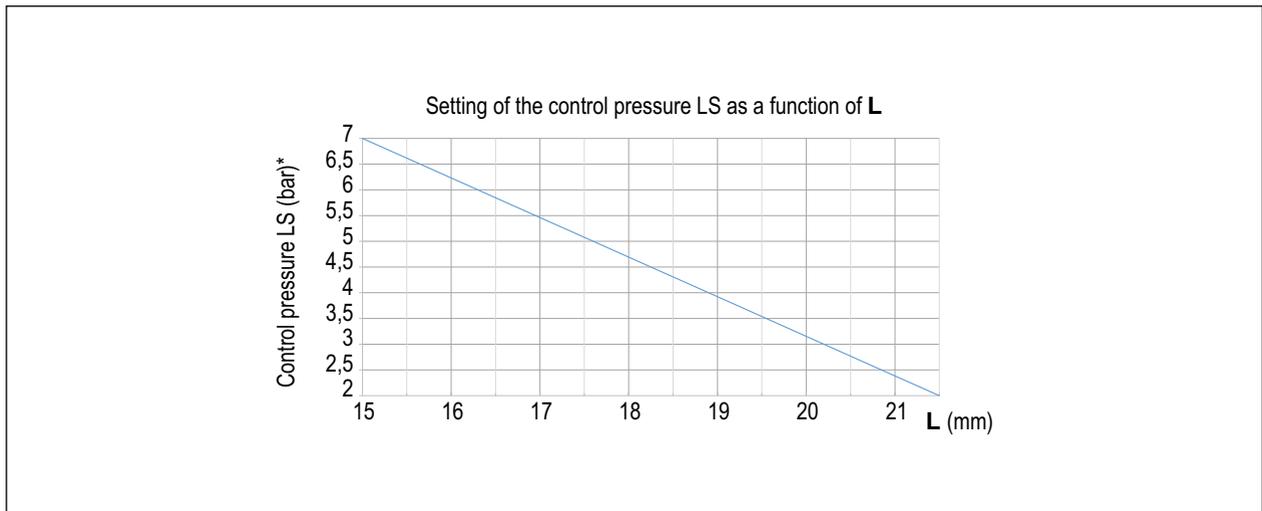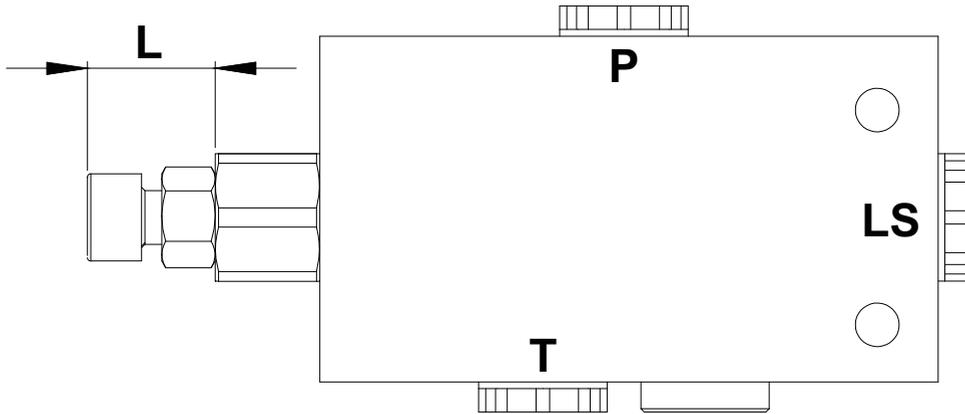

Anti-Shock Valve for Bent Axis Motors




1. Description

Series SDDA ... S-4 units are stack mounting anti-shock cross-line relief valves which relieve A to B and/or B to A. They have fast response times, seat valves with near zero-leakage, and

they have the full flow rating of the size 2 range. The \square 3 mm location pin on the actuator face of the valve prevents incorrect mounting. Valves are shipped

as standard with screw adjustment. Alternatively, they can be supplied with adjustment by hand knob, or lockable hand knob.

2. Symbols

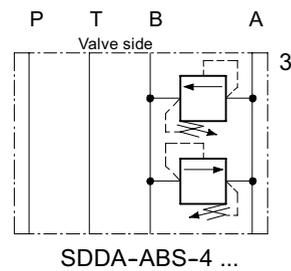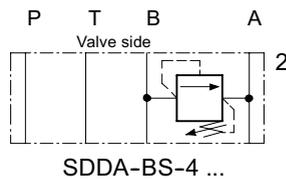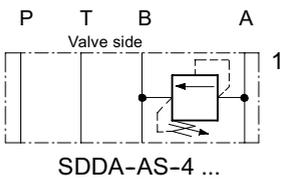

3. Main characteristics

| | | |
|--------------------------|-------|---|
| Designation | | pressure relief slice valve |
| Design | | direct acting seat valve |
| Mounting method | | stack mounting |
| Size | | ISO 4401-02-01 interface |
| Weight | kg | Model ...AS.../ ...BS...: 0,77/ Model ...ABS...:1,15 |
| Mounting attitude | | unrestricted |
| Flow direction | | see symbols |
| Operating pressure range | bar | ... 250 in P, A and B; ... 160 in T |
| Adjustment ranges | bar | code 25 = ... 250 code 16 = ... 160 code 10 = ... 100 code 04 = ... 040 code 02 = ... 020 |
| Flow rate, Q max. | l/min | 25 |
| Fluids | | HL and HLP hydraulic oils to DIN 51 524; for other fluids, please consult BUCHER |
| Fluid temperature range | _C | -25 ... +80 |
| Ambient temperature | _C | -25 ... +80 |

Replaces: D-6.60

1/4


Classification: 430.10.62.10

Reference: 400-P-300101-EN-/09.2015

Anti-Shock Valve for Bent Axis Motors

6. Schematic section

showing the relevant ports

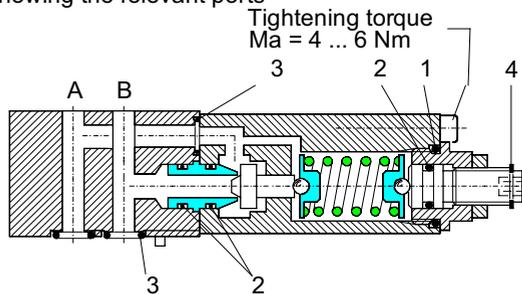

Seal kit no. DS-212, comprising *):

| Itm. | Qty. | Qty. | Description | Size |
|------|------|------|----------------|--------------------|
| 1 | 2*) | 1 | O-ring no. 016 | □ 15,60 X 1,78 N90 |
| 2 | 6*) | 3 | O-ring no. 009 | □ 5,28 x 1,78 N90 |
| 3 | 6*) | 5 | O-ring no. 010 | □ 6,07 x 1,78 N90 |
| 4 | 2*) | 1 | Snap ring | Type SS □7 |

SDDA-AS/BS-4
SDDA-ABS-4

7. Installation and servicing

All installation and servicing must be carried out with care, and by qualified personnel only. At installation, be sure to mount the valve the correct way up.

Do not confuse the flat surface (directional valve side) and the surface with O-ring counterbores (actuator side). When changing seals, the new seals

should be thoroughly oiled or greased before fitting them to the valve. Use the correct tightening torques when fitting the threaded housing and cap screws.

8. Ordering code

Ex.

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|----|---|---|---|---|----|---|---|---|---|---|---|
| S | D | D | A | - | AB | S | - | 4 | - | 25 | - | S | - | - | - | 1 |
|---|---|---|---|---|----|---|---|---|---|----|---|---|---|---|---|---|

- S = stacking valve
- D = pressure relief function
- D = direct acting
- A ... Q = standard model per current data sheet
- Z ... R = special features by arrangement
- A = relief function A to B
- B = relief function B to A
- AB = relief function A to B and B to A
- S = anti-shock, cross-line function
- 4 = ISO 4401-02-02 interface
- 25 = pressure range ... 250 bar
- 16 = pressure range ... 160 bar
- 10 = pressure range ... 100 bar
- 04 = pressure range ... 40 bar
- 02 = pressure range ... 20 bar
- S = with hex. skt. screw adjuster (standard)
- H = with hand knob adjuster type H
- Z = with lockable hand knob adjuster type Z5
- (Blank) = Nitrile seals (standard)
- Z = Viton seals
- For special seals, please consult BUCHER
- 1 ... 9 = design number (omit when ordering)

9. Related data sheets

| Old no. | New no. | |
|-----------|----------------|---|
| i - 17.00 | 400-P-015101-E | Procedure for changing the Adjuster Style |
| i - 30 | 400-P-030101-E | ISO 4401-02-01 interface |

Hydraulic Pumps



K2FA (DIN)
BENT AXIS PISTON PUMPS



K2FL (DIN)
ALUMINUM BODY
BENT AXIS PISTON PUMPS



A2FD (DIN)
DUAL FLOW
BENT AXIS PISTON PUMPS



A2FO (ISO)
BENT AXIS PISTON PUMPS



A2FS (SAE)
BENT AXIS PISTON PUMPS



AXVP Series
VARIABLE DISPLACEMENT
PISTON PUMPS



A3PP Series
AXIAL PISTON PUMPS



A3PH Series
HIGH PRESSURE
PISTON PUMPS



ByPass Valve
FOR
BENT AXIS PISTON PUMPS



LS Adapters
FOR
VARIABLE PISTON PUMPS

Hydraulic Motors



K2FM (DIN)
BENT AXIS PISTON MOTORS



A2FM (ISO)
BENT AXIS PISTON MOTORS



A2MS (SAE)
BENT AXIS PISTON MOTORS



A2FE (FixedPlug)
BENT AXIS PISTON MOTORS




Anti Cavitation
VALVE
BENT AXIS PISTON MOTORS

ByPass Valve
for Bent Axis Piston Pumps



LS Adapter
for Variable Displacement Piston Pump

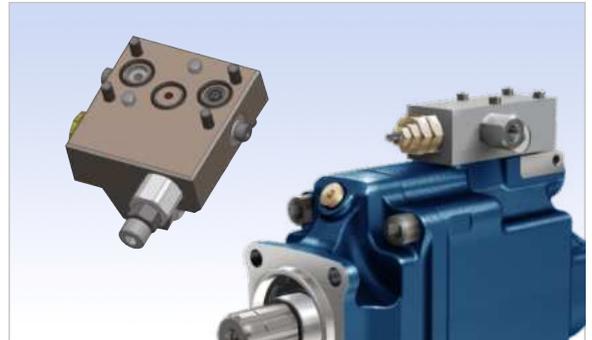

Suction Fittings
for Bent Axis Piston Pumps



Flushing Valve
for Bent Axis Piston Motors



Adapter
for Bent Axis Piston Pumps



Flange, Couplar
for Bent Axis Piston Pumps



Hydraulic Pumps, Hydraulic Motors

Bent Axis Hydraulic Piston Pumps, Bent Axis Piston Motors,
Dual Flow Hydraulic Piston Pumps, Variable Displacement Piston Pumps,
High Pressure Piston Pumps, Straight Axial Piston Pumps..



Address;

HIDRAPAC HYDRAULIC PUMP & MOTORS

Address; (PRODUCTION)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 73 / C Karatay – Konya, PO Code; 42050, Turkiye

Address; (ASSEMBLE, SHIPMENT)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 71 / AD Karatay – Konya, PO Code; 42050, Turkiye

Phone; +90 551 111 77 44